




## ***Solar Heated Water Storage With Supplemental Electric Heat***



- ◆ *Ciglass*<sup>®</sup> - porcelain fused-to-steel is impervious to chlorine and caustics - ***the ideal water vessel***
- ◆ 4500W electric heating element
- ◆ 80 and 119 gallon capacities
- ◆ 3/4" NPT connections
- ◆ 2" Non-CFC zero ozone depleting foam insulation
- ◆ Solar sensor well (accepts 6mm probe)
- ◆ Factory installed T&P valve
- ◆ Factory installed brass drain valve
- ◆ Top and side water connections
- ◆ Two magnesium anodes
- ◆ Steel exterior with powder coat finish
- ◆ 6-Year tank warranty - residential applications
- ◆ 3-Year tank warranty - non-residential applications

# EnviroStor<sup>™</sup>

This product is available from:

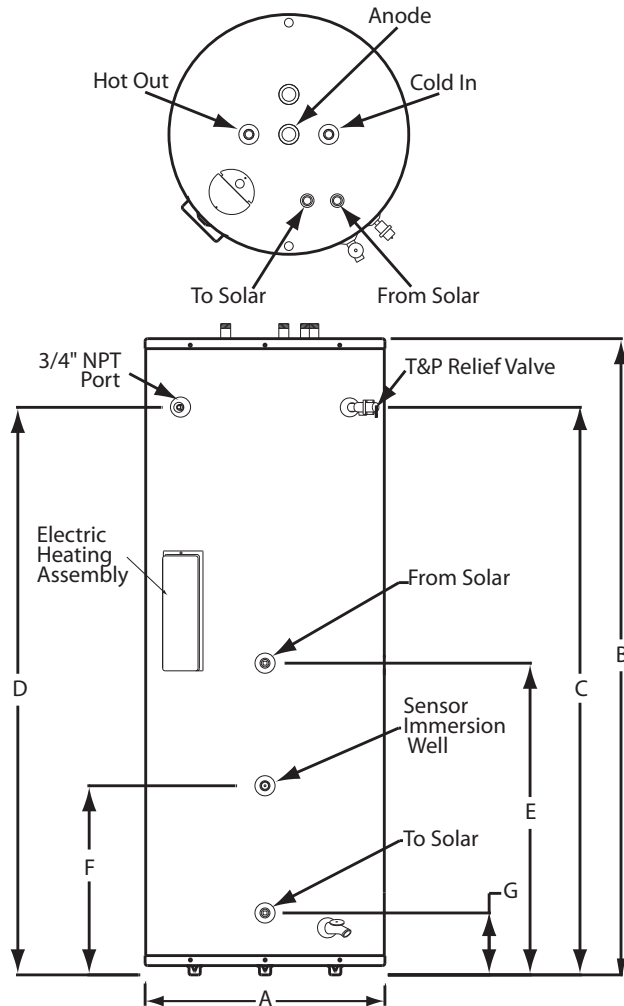

Model	Storage (gal)	Domestic Water Conn.	Solar Water Conn.	Dimensions in Inches							Shipping Weight (lbs)
				A	B	C	D	E	F	G	
80STE	80	.75	.75	24.00	64.00	57.12	57.12	31.50	19.25	6.50	252
119STE	119	.75	.75	28.00	65.00	57.75	57.75	33.75	16.25	8.75	382

**Electrical Rating:** 4.5KW, 240V

**Warning:** Installation should be in accordance with all national and/or local codes. In the absence of local codes, refer to NFPA 54 or ANSI Z21.10.1.

**Caution:** The recommended maximum hot water temperature setting for normal residential use is 120° F. Manufacturer recommends a tempering valve or anti-scald valve be installed and used according to the manufacturer's directions to prevent scalding.

**Pressures (all):** Working Pressure, 150 psi; Testing Pressure, 300 psi

**110 South Dickinson Street, Madison, Wisconsin 53703**  
**Phone 608.257-2225 • Fax 608.257.5304 • [www.bockwaterheaters.com](http://www.bockwaterheaters.com)**