



EnviroStor™

Solar Water Heater

Featuring...







High Capacity 1.5" Internal Coil Heat Exchanger with Optional 4500W Supplemental Electric Heating Element and Second Coil Heat Exchanger for Auxiliary Heat Source

- ◆ *C₂glass*® - porcelain fused-to-steel is impervious to chlorine and caustics - **the ideal water vessel**
- ◆ 50 to 119 gallon capacities
- ◆ 4500W electric heating element
- ◆ 1" NPT connections
- ◆ 2" Non-CFC zero ozone depleting foam insulation
- ◆ Steel exterior with powder coat finish
- ◆ Two magnesium anodes
- ◆ Factory installed brass drain valve
- ◆ Factory installed T&P valve
- ◆ Precision manufactured tank - high quality steel to assure strength and durability
- ◆ 6-Year tank and heat exchanger warranty - residential application
- ◆ 3-Year tank and heat exchanger warranty - non-residential application



EnviroStor™

This product is available from:

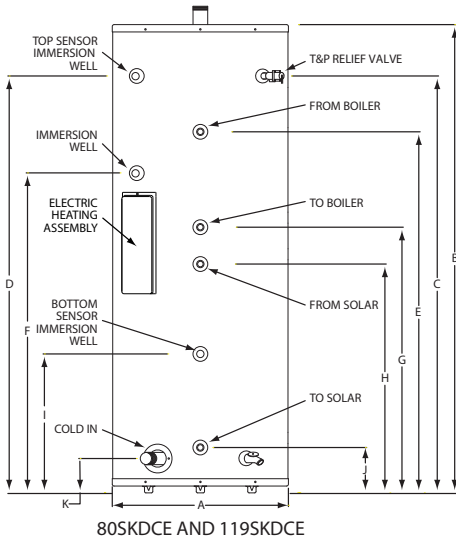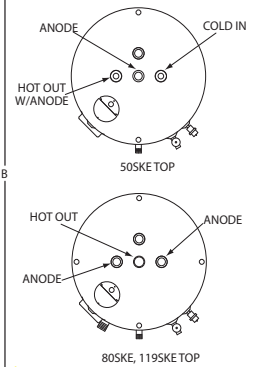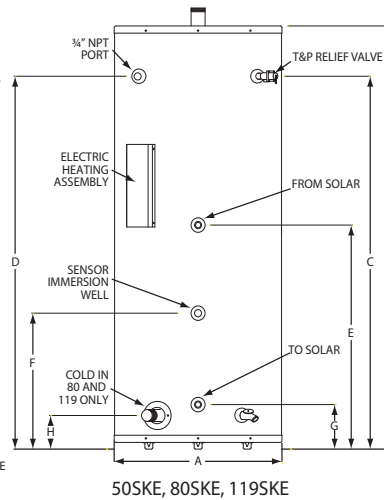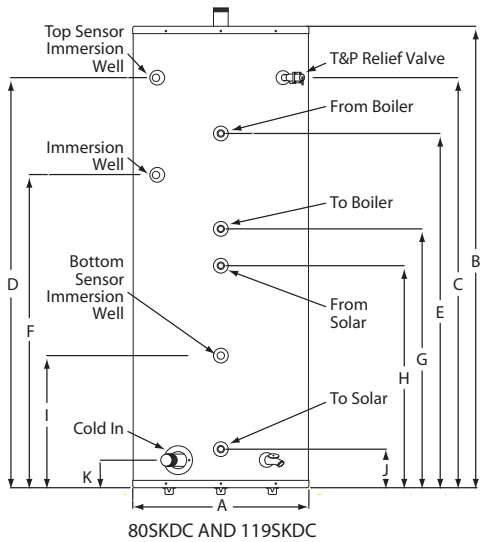

Model	Electric Element	Number of Coils	Storage (gal)	Dimensions in Inches											Shipping Weight (lbs)
				A	B	C	D	E	F	G	H	I	J	K	
50SKE	X	1	45	22.00	48.25	39.75	39.75	31.50	16.75	6.50	N/A	N/A	N/A	N/A	241
80SKE	X	1	75	24.00	64.00	57.12	57.12	31.50	19.25	6.50	5.00	N/A	N/A	N/A	307
80SKDC		2	73	24.00	64.00	57.12	57.12	49.5	46.87	36.50	31.50	19.25	6.50	5.00	327
80SKDCE	X	2	73	24.00	64.00	57.12	57.12	49.5	46.87	36.50	31.50	19.25	6.50	5.00	337
119SKE	X	1	110	28.00	65.00	57.75	57.75	33.75	16.25	8.75	6.50	N/A	N/A	N/A	407
119SKDC		2	108	28.00	65.00	57.75	57.75	51.75	49.12	38.75	33.75	16.25	8.75	6.50	427
119SKDCE	X	2	108	28.00	65.00	57.75	57.75	51.75	49.12	38.75	33.75	16.25	8.375	6.50	437

Warning: Installation should be in accordance with all national and/or local codes. In the absence of local codes, refer to NFPA 54 or ANSI Z21.10.1.

Caution: The recommended maximum hot water temperature setting for normal residential use is 120°F. Manufacturer recommends a tempering valve or anti-scald valve be installed and used according to the manufacturer's directions to prevent scalding.

Pressures (all): Working pressure, 150 psi; testing pressure, 300 psi

Electrical Rating: ("E" models only): 4.5 kW, 240V

110 South Dickinson Street, Madison, Wisconsin 53703
Phone 608.257-2225 • Fax 608.257.5304 • www.bockwaterheaters.com